


STRUCTURED EQUIPMENT CABLING

PreCONNECT® Smart Plug MU8 V2


DC IT cabling infrastructure according to EN 50173-5 and ISO/IEC 24764 without LDP

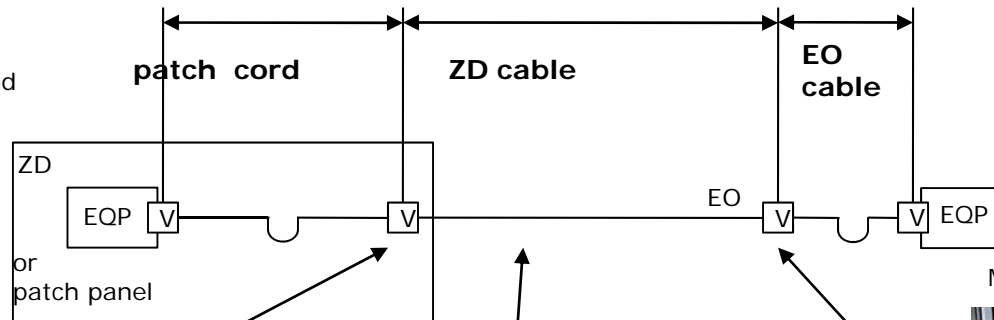

EO-cable = PreCONNECT® Smart Plug MU8 divider cable



MU8 mounting brackets in active units

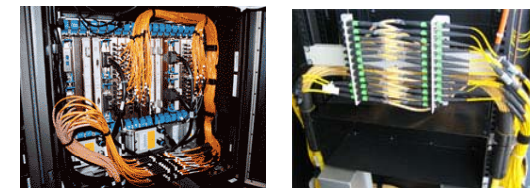


PreCONNECT® Smart Plug 19" distribution panel with front plates MU8 to MUD



PreCONNECT® Smart Plug Trunk with „standardized stepped“ MU8 legs



Subfloor box with MU8 couplers



Pros:

- full serviceable cabling for mainframes and their Director-Switches, for large SAN switches and for „floor standing/stand alone/roll-in equipment“
- after MTP® second highest achievable density at the EO (number of channels depending on EO type)
- short installation time
- low attenuation
- low costs
- connectors individually serviceable / repairable > MU8 can be separated into individual MU in the running system

Cons:

- none