



19"/4HU Subfloor-Holder OSI-P/N: 099A0052

Robust fixture for very flexible, universal and simple quick-installation of 19" Panels and active equipment inside of raised floors.

19"/4HE Subfloor-Holder
OSI-P/N: 099A0052

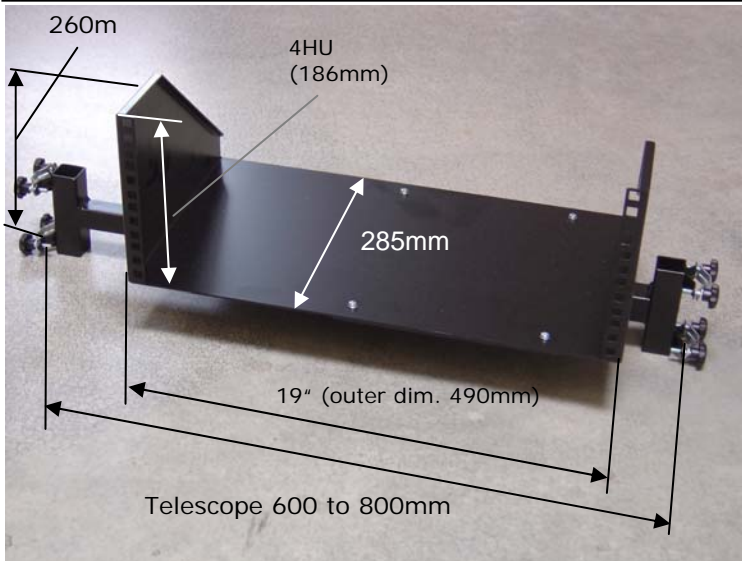

Tool less quick-installation between the columns of the raised floor. Mounting of the 19" Panels or active equipment equal to mounting them into cabinets or racks.

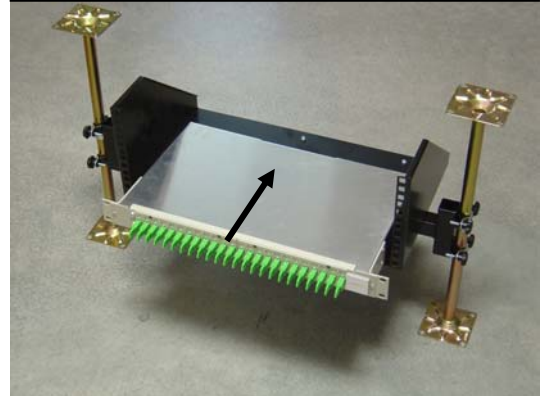

Distance/matrix between the raised floor columns:

- fits perfectly parallel into a 60x60 cm matrix
- fits diagonal into a 50x50 cm matrix

Capacity = 4HE

Earthing / grounding:

Two M6 earthing / grounding bolts inside of the 19" tray.
Electrical contact to the columns of the raised floor through the telescope support.

Material:

Steel powder coatet RAL 9005 (black)

Delivery form:

- Inclusive
- 16 pcs. Nut M6
 - 16 pcs. Screw M6x15

19"/4HU Subfloor-Holder OSI-P/N: 099A0052

Neither fiber optic nor balanced (copper) connectivity systems mustn` t be unprotected inside of a raised floor !!!


→ Therefore we recommend to mount our Patchfield-Protector.

They can be ordered separate by the partnumbers below:

1HU = OSI-P/N 099A0059

2HU = OSI-P/N 099A0060

Details see separate data sheet.

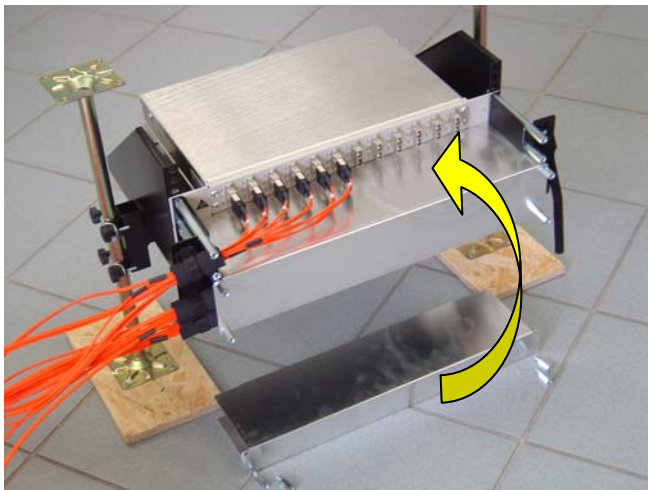

1HE = OSI-P/N 099A0059

2HE = OSI-P/N 099A0060