


„LEAN“ CABLING  
PreCONNECT® Trunk-Multijumper V1

~~DC IT cabling structure according to EN 50173-5 and ISO/IEC 24764 without LDP~~

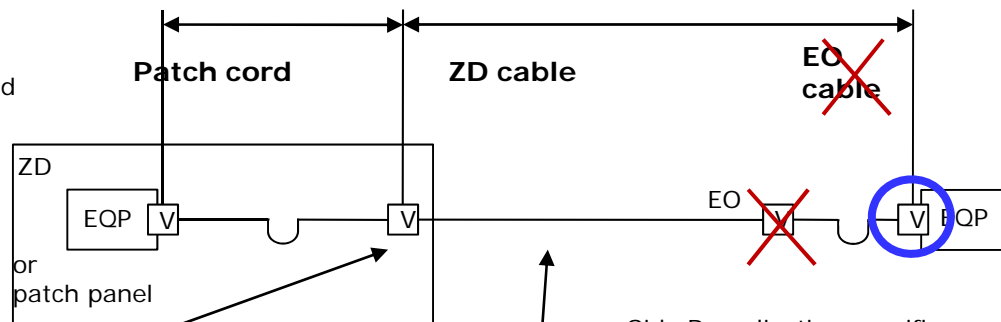


PreCONNECT®  
19" distribution panel

Side A  
„standardized stepped“  
MUD or LCD legs




PreCONNECT® Trunk Multijumper

Side B application specific  
up to 2,5m legs  
mainly with LCD connectors for direct  
attachment of active components



mounting bracket for  
cable divider  
universal 1HU  
1-fold and 19"

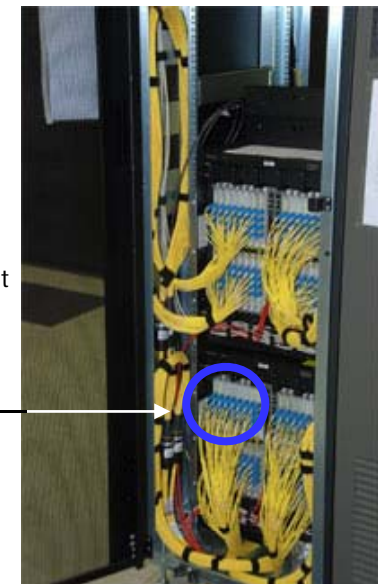

**Pros:**

- lowest attenuation
- lowest costs
- highest flexibility because of customized application specific configuration
- connectors individually serviceable/repairable

**Cons:**

- not equipment neutral
- not conform to standard EN 50173-5, for no EO